

1. 8-3. 6V      OOK

JZCR11

: V1. 3  
: 2020-05

---



## 1.

JZCR11	OOK	ISM	315 / 433.92
JZCR11		JZCR11	300 - 480 MHz
		RFPDK	433.92 MHz
3.8mA	-113dBm		

## 2.


- 300 - 480 MHz
- OOK
- 0.1 - 40kbps
- -113dBm 3kbps, 0.1% BER
- 330KHz
- 
- 
- 1.8 - 3.6 V
- 3.8mA @ 433.92MHz
- 

## 3.

- 
- 
- 
- 
- 
-




4.

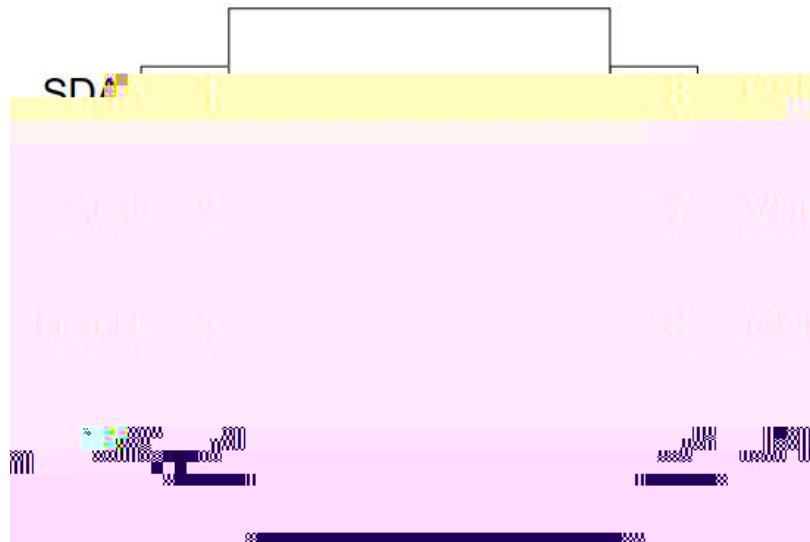

JZCR11 SOP8  
1. JZCR11

		I/O	
1	SDA	I/O	SDA
2	SCL	I	SCL
3	DCOUT	O	
4	XI N	I	
5	RFI N	I	LNA
6	GND	I	
7	VDD	I	
8	CSB	I	CSB

5.

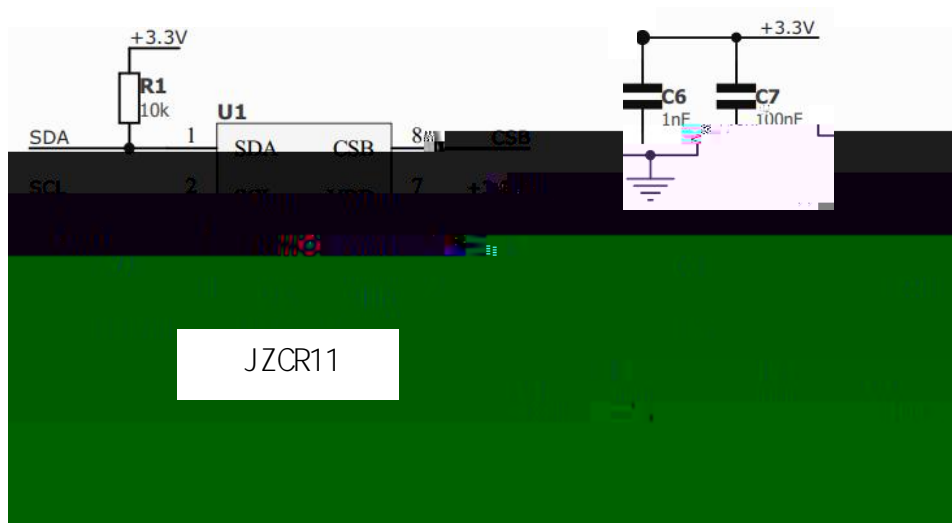





---

6.3

5





7.

JZCR11

SOP8

:

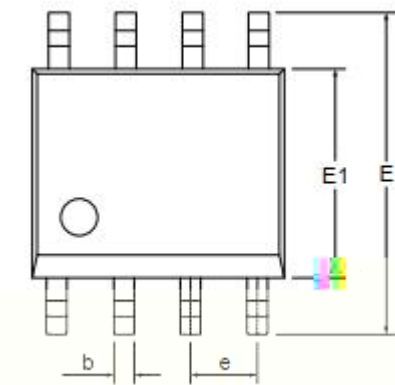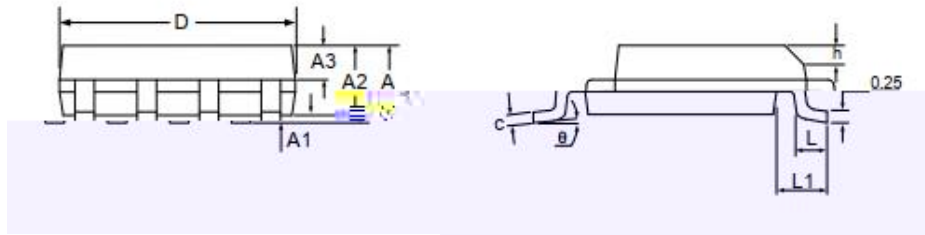

	mm)		
A	-	10	1.75
A1	0.10	3	0.225
A2	1.30	100	1.50
A3	0.60	100	0.70
b	0.39	470	0.48
c	0.21	36	0.26
D	4.70	36	5.10
E	5.80		6.20
E1	3.70		4.10
e	1.27 BSC		
h	0.25		0.50
L	0.50		0.80
L1	1.05 BSC		
	0	-	8°